

Genee Slate

userguide



The R&TTE Directive



We, the manufacturer hereby declare that this equipment, model RCK-T07 is in compliance with the essential requirements and other relevant provisions of Directive 1995/5/EC.

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

CAUTION:

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

RF exposure warning

The equipment complies with FCC RF exposure limits set forth for an uncontrolled environment.

The equipment must not be co-located or operating in conjunction with any other antenna or transmitter.

Congratulation on purchase of Wireless Tablet

Wireless Tablet is a 2.4 G wireless solution table. Without complicated wireless software installation, just install tablet driver and plug our wireless receiver dongle to your PC and you use it freely any where. Moreover, Wireless tablet support Windows Vista™. If you do not want to use these extra hot key, volume adjustment and Macro Key function, you can even do not need to install any driver. Just follow this quick guide and enjoy your e-life with our Wireless Tablet.

1. Package content



▲Tablet*1



▲New boss pen*1



▲Receiver dongle*1



▲Li-ion battery*1



▲pen tip*2



▲Pen tweezers*1



▲CD*2



▲Quick guide*1




▲Application manual*1


2. Hardware introduce

Tablet:


Front side

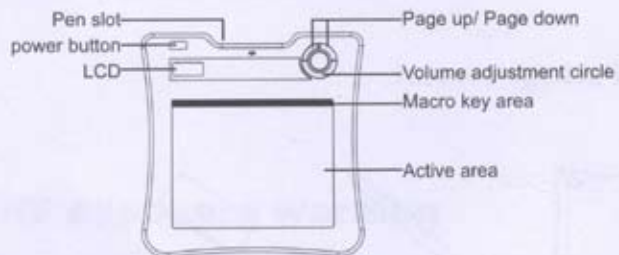

Back side

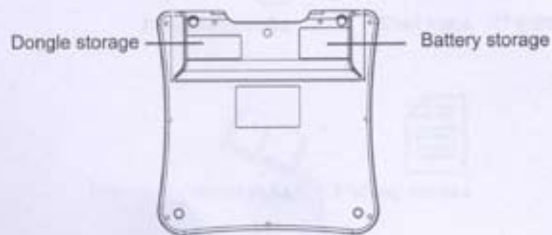


Receiver Dongle

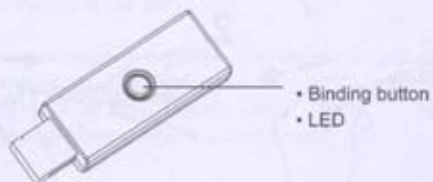

Pen

How to change battery

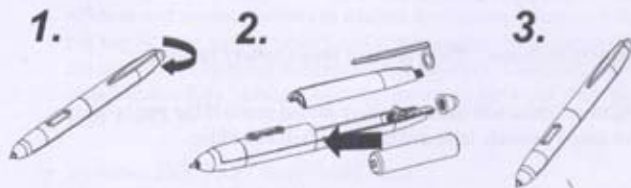



How to change pen tip





3. LCD introduce




 Power on: After press the power button 3 seconds, this icon is showed.

 Battery Indicator : There are four levels battery indicator.

 Active: Tablet will get into power saving mode if the pen is off the active area 3 seconds later and this icon will be hidden.


 Connecting: After you bind successful, the icon is showed. It means that your Tablet have connected to PC successful.



 Token right: It means that your tablet is authorized by the receiver dongle to send the package.




The interaction between pen and tablet:

- Blanking: Pen gets in to the detectable active area.
- Still: Pen tip on the active area.

 Volume adjustment indicator : you can use the pen on the volume adjustment circle to adjust the volume.

-  Clockwise: adjust volume louder
-  Anticlockwise: adjust volume down

 Tablet number : One receiver dongle can connect to more than one wireless tablet. Therefore, if you connect more than one wireless Tablets, you can distinguish which tablet it is.

4. Installation

- Windows Vista Home Premium above
Wireless Tablet is a Windows Vista plug and Play device. You can use the basic tablet function without installing any driver, just plug-n-play. However, our patented macro key function provides you an efficient and productive way to operate application. Moreover, the hot key of Page up/Page down and volume adjustment circle will require driver (included in Macro Key Manager). Therefore, you can install Macro Key Manager to make the macro keys and these hot keys work.
- Windows 2000 / XP / Vista Home basic
Under Windows 2000 / XP / Vista Home basic, you have installed driver (included in Macro Key Manager). Therefore, please install Macro Key Manager before the device is plugged to your PC. Once Macro Key Manager is installed successfully, Wireless Tablet can work and the macro key and the hot keys work also.

5. Star Use

1. Plug receiver dongle to your PC
2. Press at least 3 seconds to power on Wireless Tablet
3. Press the biding button on the back side of the tablet and biding button of the receiver dongle at the same time.
4. The LCD of Tablet will blank and the blue LED of receiver dongle blank also.
5. Once the binding is successful, the number on the LCD will show 000 to 001 or others (if binding more than one Wireless Tablet).
6. Since there are power saving design with our pen, please always have our pen to tip on any area of the tablet first to wake up the pen before you start use tablet.
7. Check it the information of LCD indicator is display correctly.
8. If yes, you can start to use it freely.

6. Specification

Solution	Wireless 2.4G RF
Dimension	278*282*20mm
active area	7.84**5.92"
Resolution	2000dpi
Report rate	120 rpst
Pen pressure	1024 levels
Macro key	16(top of active area)
Hot key	Page up / page down
LCD type	TN LCD
LCD size	17.7*40.9mm
LCD Icon content	battery status – 4 levels; charged; / connection mode ; connection power status/ volume status /Tablet number
Battery type	Nokia BL5C Li-ion rechargeable battery
battery capacity	800mA
battery life	16 hrs continuing mode
power source	USB charged
power button	electrical power button
power consumption	max 50 mA(operation mode)
Receiver dongle	Yes