

GENEEview
X-25i

Tel: +91 (0)124 4934500



2500 Lumens | HID Technology | 0.63:1 Ultra short throw

Explore the world around you with incredible
Genee Projectors



Genee Solutions India Pvt. Ltd.

Address: Plot No. 692, Udyog Vihar, Phase V, Gurgaon, Haryana-122016, India
Tel: +91 (0)124 4934500, Fax: +91 (0)124 4934501 Email: info.india@geneeworld.com,
Web: www.genee-india.com, www.geneeworld.com

Specifications


GENEEview
X-25i



Technology	.63" 3LCD
Brightness	2500 Lumens
Native Resolution	1024 x 768 (XGA)
Supported Resolution	1600 x 1200 (UXGA)
Colors	16.7 million
Brightness Uniformity	80%
Projection Methods	Desktop front/rear; Ceiling front/rear
Contrast Ratio	600:1
Aspect Ratio	Native 16:10; Compatible 16:9 and 4:3
Image Size	49" to 100" / 124.5cm to 264cm
Projection Distance	2' to 4.2' / 0.61m to 1.28m
Keystone Correction	Vertical +/- 30°
Horizontal Scan Rate	31 to 92 kHz
Vertical Scan Rate	48 to 120 Hz
Audio Output	1 x 8W mono
Lamp	210W UHP
Lamp Life	3000/5000 hours (standard/economy)
Optical Offset	120%
Remote Control	Full function IR remote with laser pointer
Noise Level	36dB (standard) / 33dB (economy)
Power Supply	Universal AC Input 100–240V at 50-60 Hz
Power Consumption	310W 1W in Standby mode
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible. USB 1.0 or greater required
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	VGA x 2, HDMI, Composite video with 2 RCA (R/L) audio-in, Component video, S- Video, Audio 3.5mm in x 2, LAN, RS232, USB port for interactive function, VGA and 3.5mm outputs
Service and Network Control	RS232 and RJ45
Weight	9 lbs / 4.08kg
Dimensions (W x H x D)	14.2" x 5.2" x 13.7" / 36.1cm x 13.2cm x 34.8cm
Operating Temperature	41° ~ 95° F, Humidity 20% to 80%, non- condensing
Standard Accessories	AC power cord, VGA cable, USB cable, Remote Control with batteries, User manual (cd), LightPen3 software, Interactive wand and pressure sensitive Lightpen, carry case for wand and pen
Optional Accessories	Replacement lamp, replacement remote, ALLINONE ceiling mount, Wallmount-U, Wallmount-U60, USB Booster
Safety Certifications	FCC-B, UL, CB, CE, CCC, ROHS, REACH
Safety	Kensington Lock Port, Keypad lock, Anchor security bar

Key Features

- Ultra short throw 0.63:1
- 100% faster response time (60 frames per second)
- Accurate within 3 pixels
- System on Chip technology
- Human Interface Device (HID) technology
- Annotate over full motion video
- Compatible with any mouse application on your computer
- Save your drawings/images/edits on your computer for later viewing
- Plug and play
- Retrofittable
- Ships with both a telescoping wand and pressure sensitive lightpen for interaction
- Five auto features (Auto Search, Auto Sync, Auto Ceiling, Auto Keystone and Auto Filter Alert)
- Seven display modes (Natural, Cinema, Daylight, Green board, White board, Black board and User)
- Side changing lamp and filter
- Advanced anti-theft features, Kensington lock, keypad lock and security anchor bar
- Built-in 8W speaker
- Built in Network Control software via RJ45 (LAN) connection
- Multi language OSD (On-Screen Display)
- Closed caption
- Interactive software package included
- Logo capture
- Image freeze function

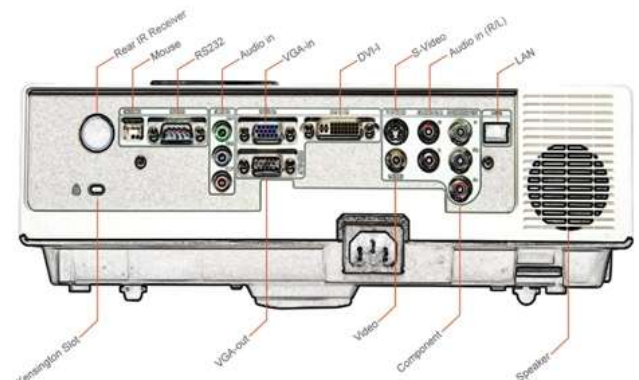

Address: Plot No. 692, Udyog Vihar, Phase V, Gurgaon, Haryana-122016, India

Tel: +91 (0)124 4934500, Fax: +91 (0)124 4934501

Email: info.india@geneeworld.com, Web: www.genee-india.com, www.geneeworld.com